


Shrink-Out Smoke Vents

Gravity-Operated Automatic Drop-Out Skylight Smoke & Heat Vents

Economical Alternative to Mechanical Venting Units

Wasco's shrink-out smoke vents are gravity operated acrylic double domes designed to automatically shrink and fall out in the event of a fire.

- UL tested and approved
- Available with or without integral insulated curbs
- Available with 360° or 500° UL listed fusible links for specific control of venting allowing unit to be used with ESFR (early suppression fast response) sprinkler systems
- Roof Class 90psf Uplift
- Less expensive alternative to mechanical venting
- Optional safety screens available
- Area below the unit must be clear of obstructions which could impede the release of the domes.

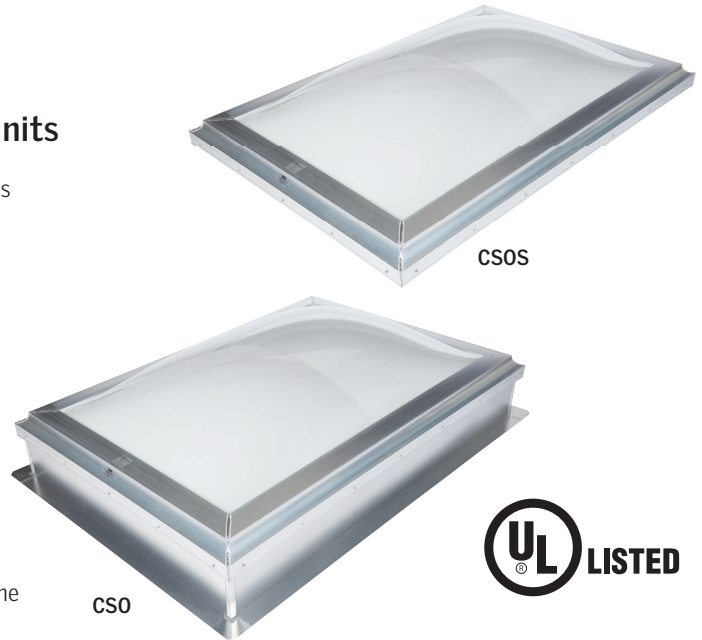


Standard Sizes:

Curb Mount (CSOS)

SIZE	O.D. OF CURB
5555	51" x 51"
5566	51" x 63"
5578	51" x 75"
5596	51" x 93"
55102	51" x 99"
6678	63" x 75"
6696	63" x 93"
66102	63" x 99"

Deck Mount (CSO)

SIZE	ROUGH OPENING
5555	48" x 48"
5566	48" x 60"
5578	48" x 72"
5596	48" x 90"
55102	48" x 96"
6678	60" x 72"
6696	60" x 90"
66102	60" x 96"

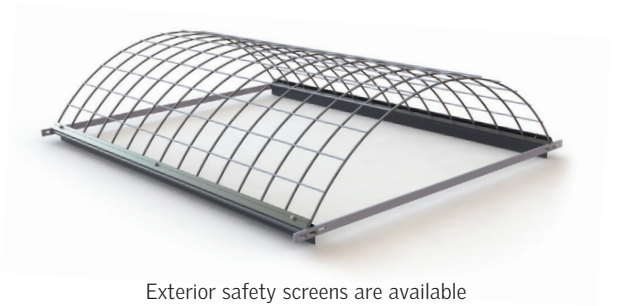

In addition to selecting the correct skylight for the application, VELUX recommends that the customer consider protecting all skylight openings and skylights with one or more of the fall protection accessories.