

SPECIFICATIONS

REEF™ TWO HANDLE MINI-WIDSPREAD LAVATORY FAUCET


Model

D304033

Description

- Ceramic disc valves
- 4 1/2" high spout, 4 5/8" spout length, laminar flow
- Includes 50/50 touch down drain DA505219P with color-matching flange and cap and black tailpiece
- 3 hole mount, 4" - 12" installation
- 1.5gpm (5.7L/min) maximum flow rate @60 psi

Flow Rate

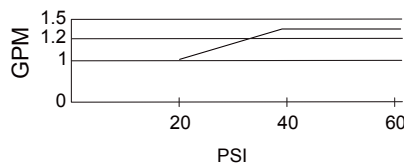

Standards



NSF/ANSI 372

• NSF/ANSI 372

MEETS ASME A112.18.1M/A112.18.1

• ASME A112.18.1M/A112.18.1




• ADA Accessibility Guidelines for Buildings and Facilities - 309.4 Operation for Operable Parts

Warranty

Danze products are covered by a manufacturer's limited "lifetime" warranty for manufacturing defects.

Finishes Available

- Chrome
- Other: Refer to Price List for additional finish

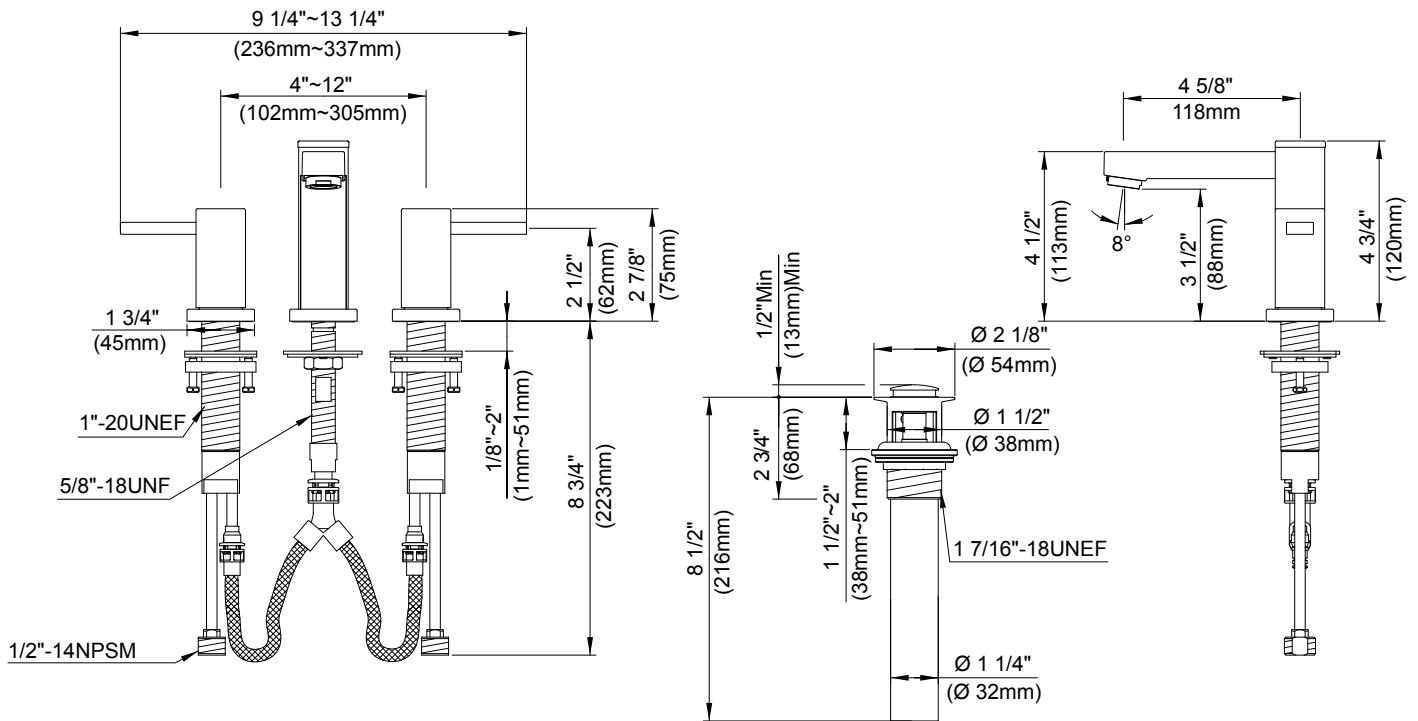

Submittal Information:

Job Name: _____

Location: _____

Contractor: _____

Contact #: _____